




**2 7/8" O.D.**  
**3-PORT**  
**1" ACT BALL**

**2 7/8" PBL BALL LOCK BYPASS SYSTEM**  
**3 - PORT TECHNICAL SHEET**

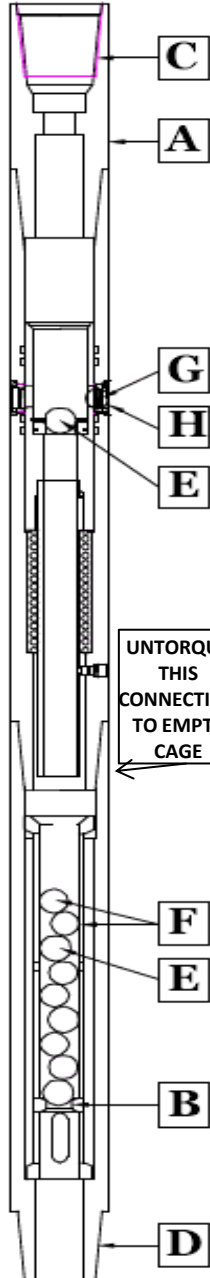

- SERIAL #
- A - TOOL O.D.
- B - TOOL I.D.
- FLOW AREA THROUGH TOOL
- C - BOX CONNECTION
- D - PIN CONNECTION
- G - ACTIVATION BALL/# TO ACTIVATE
- H - DIAMETER
- E - MATERIAL
- SHEARING PRESSURE
- F - DEACTIVATION BALL/# TO DEACT.
- DIAMETER
- MATERIAL
- SHEARING PRESSURE
- G - LOCKING BALL/# TO LOCK OPEN
- DIAMETER
- MATERIAL
- SHEARING PRESSURE
- H - SIZE OF PORT
- NUMBER OF PORTS
- TFA WHEN TOOL IS OPEN
- NUMBER OF CYCLES
- OVERALL LENGTH
- WEIGHT
- TENSILE STRENGTH
- TORSIONAL STRENGTH
- MAKE UP TORQUE

SERIAL #	
A - TOOL O.D.	2.875"
B - TOOL I.D.	9/16"
FLOW AREA THROUGH TOOL	0.785 SQ.IN.
C - BOX CONNECTION	2 3/8 PAC
D - PIN CONNECTION	2 3/8 PAC
G - ACTIVATION BALL/# TO ACTIVATE	1
H - DIAMETER	1"
E - MATERIAL	Torlon
SHEARING PRESSURE	
F - DEACTIVATION BALL/# TO DEACT.	3
DIAMETER	13/16"
MATERIAL	Steel
SHEARING PRESSURE	NA
G - LOCKING BALL/# TO LOCK OPEN	NA
DIAMETER	NA
MATERIAL	NA
SHEARING PRESSURE	
H - SIZE OF PORT	0.75"
NUMBER OF PORTS	3
TFA WHEN TOOL IS OPEN	1.32 SQ.IN
NUMBER OF CYCLES	7
OVERALL LENGTH	5 1/2 - 6 1/2 FT
WEIGHT	115 LBS
TENSILE STRENGTH	415,000 LBS
TORSIONAL STRENGTH	12,000 FT/LBS
MAKE UP TORQUE	2,200 FT/LBS

**NOTES**

- \* **NO THRU DRIFT WHEN BALLS ARE IN TOOL**
- \* Tool is rated to operate in temp up to 420 degrees F
- Maximum Flow Rate Before Activation is 5 BPM**
- Maximum Flow Rate After Activation is 6 BPM**

